


PRV

PATENT- OCH REGISTRERINGSVERKET
Patentavdelningen

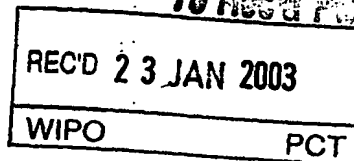

10/500308

28 JUN 2004

PCT/SE 02 / 0 2 4 2 2

Intyg Certificate



Härmed intygas att bifogade kopior överensstämmer med de handlingar som ursprungligen ingivits till Patent- och registreringsverket i nedannämnda ansökan.

This is to certify that the annexed is a true copy of the documents as originally filed with the Patent- and Registration Office in connection with the following patent application.

(71) Sökande Telefonaktiebolaget L M Ericsson (publ), Stockholm
Applicant (s) SE

(21) Patentansökningsnummer 0200308-5
Patent application number

(86) Ingivningsdatum 2002-02-04
Date of filing

(30) Prioritet begärd från 2001-12-27 SE 0104422-1

Stockholm, 2003-01-08

För Patent- och registreringsverket
For the Patent- and Registration Office

Lina Oljeqvist
Lina Oljeqvist

Avgift
Fee

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

BEST AVAILABLE COPY

A METHOD AND APPARATUS RELATING TO TRANSMISSION OF DATA

Field of the invention

5 The present invention relates to data transmission in general, and more particularly to a method and apparatus for improving the procedures for error detection and recovery in data communication systems.

Background

10 Most data communication systems consist of a number of nodes, between which data is transmitted by use of several protocols. The protocols used within a node is often referred to as a protocol stack, the lower layer protocols in the protocol stack being closer to the physical interface used for the transmission of data to/from the node, while higher layer protocols are close to the application used by a user of the data communication system. The protocols used within different nodes need by no means be the same. Each protocol in a protocol stack has a corresponding protocol in another protocol stack in at least one other
15 node, with which the protocol in the stack communicates. The highest layer protocol used within the system is often referred to as the application layer protocol. The lower layer protocols used within the data transmission system enable the application layer protocol in one node to communicate with the application layer protocol in other nodes.

20 For some transmission types, such as the transmission of speech, it is more important that data arrives on time than that the received data is an exact copy of what was originally transmitted. For other transmission types, such as the downloading of information from the Internet, it is important that the received data is identical to the data originally transmitted, and this criterion is given higher priority than that the data arrives at the receiver within a
25 certain period of time. In many data communication systems, a possibility of re-transmitting data, which for some reason was not correctly received, is therefore included. Such functionality for re-transmission of data can be implemented at several protocols used within a protocol stack.

Summary

A problem to which one aspect of the present invention relates is how to make the communication of data in a data communication system more efficient.

5 This problem is addressed by a method in a data communication system wherein data is transmitted by use of at least two protocols that are capable of re-transmission of data. Each of said protocols are implemented in at least two nodes of said data communication system, the implementation of a protocol implemented in a transmitting node being a transmitting protocol entity and the implementation of a protocol in a receiving protocol being a
10 receiving protocol entity. One of said at least two protocols capable of re-transmission of data is a higher layer protocol than another of said at least two protocols, said another protocol therefore being a lower layer protocol. The higher layer transmitting protocol entity provides the lower layer transmitting protocol entity with a protocol data unit to be transmitted. The method is characterised by the higher layer transmitting protocol entity
15 awaiting a transmission result from said lower layer transmitting protocol entity, said transmission result reporting the result of the transmission of said protocol data unit by said lower layer transmitting protocol entity, the higher layer transmitting protocol entity receiving said transmission result, and deciding, responsive to said transmission result, whether the higher layer transmission protocol entity should re-provide said lower layer
20 transmitting entity with said protocol data unit for transmission.

The problem is further addressed by a computer program comprising software code portions for, when said software code portion is run on a computer serving as a transmitting node in a data communications system, providing another computer program
25 with a protocol data unit to be transmitted within said data communication system. The computer program further comprises software code portions for re-providing said another computer program with the protocol data unit. The computer program is characterised by computer code portions for awaiting, from said another computer program, a transmission result reporting the transmission of said protocol data unit and computer program portions
30 for receiving said transmission result from said another computer program. In one aspect of the invention, said computer program further comprises computer code portions for deciding whether or not to re-provide said protocol data unit to said another computer

program, the computer code portions for deciding being adapted to use said transmission result in deciding whether or not to re-provide said protocol data unit

5 By said method and computer program is achieved that the risk is eliminated that the same user data is successfully transmitted between nodes more than once. Hence, the transmission resources will be used in a more efficient way, resulting in that more data transmission session can be served, and that the transmission times for each data transmission session will be shortened. The risk of a protocol, such that the Transmission Control Protocol (TCP), decides that a data session is not functioning properly and should
10 be closed due to long transmission times is reduced.

The problem is further addressed by a method in which the lower layer transmitting protocol entity sends a transmission result to the higher layer transmitting protocol entity, said transmission result reporting the result of transmission of the protocol data unit by the
15 lower layer transmitting protocol entity. Hereby is achieved that the higher layer transmitting protocol entity receives information based upon which the decision of whether or not the protocol data unit should be re-provided is taken.

In one aspect of the invention, said protocol data unit is identified in the communication
20 between the higher layer transmitting protocol entity and the lower layer transmitting protocol entity, by use of an identifier. Hereby is achieved that several protocol data units can be transmitted directly following each other. Said identifier could e.g. be an identifier local to the communication between the higher layer transmitting protocol entity and the lower layer transmitting protocol entity. By using a local identifier is achieved that the
25 identifier can take large values. Furthermore, the lower layer transmitting protocol entity will not need to open the protocol data unit provided by the higher layer transmitting protocol entity. In one embodiment, said identifier is assigned to said protocol data unit by said higher transmitting protocol entity. Hereby is achieved that the communication of said identifier can be performed in the message in which the protocol data unit is provided to
30 the lower layer transmitting protocol entity. In another embodiment, said identifier is assigned to said protocol data unit by the lower layer transmitting protocol entity.

In one embodiment of the invention, said higher layer transmitting protocol entity receives an acknowledgement of reception of said protocol data unit from said lower layer transmitting protocol entity after having provided said lower layer transmitting protocol entity by said protocol data unit, said protocol data unit being identified by said identifier in said acknowledgement of reception.

In one aspect of the invention, said transmission result is transmitted to said higher layer transmitting protocol entity from said lower layer transmitting protocol entity in a message which is transparently relayed by some or all of any intermediate protocol entities.

The invention is advantageously applicable to data communication systems comprising a radio interface. One aspect of the invention is applicable to data communication systems wherein said radio interface is a radio interface in a mobile radio communication system. In situations where said mobile radio communication system is a mobile radio communication system operating according to the General Packet Radio System standard, said higher layer transmitting protocol entity could be a Logical Link Control protocol and said lower layer transmitting protocol entity could be a Radio Link Control/Media Access Control protocol.

Brief description of the drawings

Fig. 1 is an overview of a data communication system.

Fig. 2 is an example of protocol stacks used for communication of data within a data communication system including a mobile radio network operating according to the GPRS standard.

Fig. 3 gives a schematic example of how user data is encapsulated by protocols used for transmission in the data communication system.

Fig. 4a is an example of an inventive signalling diagram used for signalling between a higher layer protocol and a lower layer protocol, both protocols being capable of re-transmission of data, when both protocols are implemented in the same node.

Fig. 4b is an example of an inventive signalling diagram used for signalling between a higher layer protocol and a lower layer protocol, both protocols being capable of re-transmission of data, when the two protocols are implemented in different nodes.

5 Fig. 5a is an example of a message used for transmitting a Protocol Data Unit (PDU) from a higher layer protocol to a lower layer protocol.

Fig. 5b is an example of a message used for acknowledging the reception of a PDU by a lower layer protocol to a higher layer protocol.

10

Fig. 5c is an example of a message used for reporting the result of the transmission of a PDU by a lower layer protocol to a higher layer protocol.

Fig. 6 schematically illustrates one embodiment of the invention in a flow chart.

15

Fig. 7 is an example of protocol stacks used for communication of data within a data communication system including a mobile radio network operating according to the Universal Mobile Telephony System (UMTS) standard.

20 **Detailed description**

A data communication system 100 including radio interface 105 is illustrated in Fig. 1. The data communication system 100 will hereinafter be referred to as the system 100. The system 100 shown in Fig. 1 is, for the purposes of illustration, shown to include a mobile radio network 110 operating according to the General Packet Radio Services (GPRS) standard. However, the invention is advantageously applicable also to systems 100 including other radio interfaces, such as radio interfaces operating according to the Universal Mobile Telephony System (UMTS) standard or the Wireless Local Area Network (W-LAN) standard, or to any other system 100 in which several protocols are individually capable of re-transmission of data.

25
30

The mobile radio network 110 comprises a Base Station Subsystem (BSS) 115, a Serving GPRS Support Node (SGSN) 120, and a Gateway GPRS Support node (GGSN) 125. A

Mobile Station (MS) 130 can communicate within the system 100 via the radio interface 105. On the other side of the radio interface 105, the BSS 115 is connected to the SGSN 120 via an interface 135 referred to as the Gb-interface 135. The SGSN 120 is further connected to the GGSN 125, which in turn is connected to other networks 140 such as the Internet, Public Switched Telephony Networks (PSTNs), Integrated Services Digital Networks (ISDNs) or other mobile radio networks.

In Fig. 2, an example of protocol stacks that can be used for the transmission of data in system 100 of Fig. 1 are illustrated. For illustrative purposes, the protocol stacks shown are not complete, but some protocols, such as higher layer protocols in the SGSN 120 protocol stack and the physical layer protocols, are left out. Hereinafter, when referring to a certain protocol in general, a reference numeral such as e.g. reference numeral 200 will be used, while the same reference numeral, with a letter appended, will be used for referring to the protocol when implemented on a specific node. Hence, protocol 200A, 200B, 200C etc, will all be implementations of the protocol 200, on different nodes. By a protocol which is implemented on a node should be understood a computer program, executable on a processor on said node, in accordance with the functionality of the protocol. However, in order to simplify the description, the term protocol is used both to denote the set of instructions for transmission known as a protocol, and to denote the executable computer program implemented on a node for the execution of said instructions. In the following, a protocol in a protocol stack of a transmitting node will be referred to as the transmitting entity of the protocol, while the corresponding protocol to which the protocol in the transmitting node transmits data will be referred to as the receiving entity of the protocol. Obviously, in two way communication, a protocol in a certain protocol stack will alternately be the receiving entity of the protocol and the transmitting entity of the protocol.

The example of a protocol stack for use in the MS 130 shown in Fig. 2 comprises the following protocols: An application layer 200A, Transmission Control Protocol (TCP) 202A, Internet Protocol (IP) 205A, SubNetwork Dependent Convergence Protocol (SND CP) 210A, Logical Link Control (LLC) 215A, Radio Link Control/Media Access Control (RLC/MAC) 220A. The protocol stack used in BSS 115 for communication via radio interface 105 comprises the RLC/MAC 220B, which is a protocol corresponding to RLC/MAC 220A, and a relay layer 225, while the protocol stack of BSS 115 used for

transmission via the Gb-interface 135 comprises the protocols Base Station System GPRS control (BSSGP) 230A and network 235A (network 235 is used in the figure to represent the use of either Frame Relay or TCP/IP, as specified in *3rd Generation Partnership Project (3GPP) Technical Specification (TS) 48.016, 3rd Generation Partnership Project*).

5 In SGSN 120, the following protocols are shown (starting with the lower layers protocols): network 235B, BSSGP 230B, LLC 215B and SNDCP 210B. The corresponding protocols of TCP 202A and IP 205A, i.e. TCP 200B and IP 205B, are implemented in further nodes, not shown in Fig. 2. When MS 130 is sending data, the RLC/MAC 220A is the transmitting entity of the RLC/MAC protocol 220 while RLC/MAC 220B is the receiving entity of the RLC/MAC protocol 220, and vice versa. When RLC/MAC 220A is the transmitting entity of the RLC/MAC protocol 220, then the LLC 215A is the transmitting entity of the LLC protocol 215, and so forth.

With reference to Fig. 2, a schematic example 130 is shown in Fig. 3 of how user data 300, to be transmitted by MS 130, is encapsulated by the protocols used for transmission in system 100, the protocols in the protocol stack of MS 130 being used in the example for purposes of illustration. Note, however, that the protocols used for encapsulation of user data 300 need not be located within the same node, but can be located in different nodes involved in the transmission. Each protocol of the protocol stack adds information to the data by adding a header, and possibly a trailer, to the data received from the protocol layer above, as is shown in Fig. 3. In Fig. 3, in order to simplify the description, only the addition by each protocol of a header layer is shown, and no addition of a trailer. In the application layer 200, an application layer header 305 is added to the user data 300, to form the application data 310, which makes up an application layer Protocol Data Unit (PDU) 315. In TCP 202A, a TCP header 320 is added to the application layer PDU 315, in order to make up a TCP PDU 325. Similarly, when receiving the TCP PDU 325 from the TCP 202A, IP 205A adds an IP header 330 to the TCP PDU 325 in order to form an IP PDU 335. In SNDCP 210A, an SNDCP header 340 is added to the IP PDU 335 in order to form an SNDCP PDU 345, and in LLC 215A, an LLC header 350 is added to the SNDCP PDU 345 in order to form a LLC PDU 355. Similarly, RLC/MAC 220A adds an RLC/MAC header 360 to the LLC PDU 355 in order to form an RLC/MAC PDU 365. Hence, the same user data 300 is included in all the PDUs 315, 325, 335, 345, 355 and 365 of Fig. 3. In order to simplify the description, each PDU of Fig. 3 is shown to correspond to one PDU of

each other protocol. However, a protocol data unit of a higher layer protocol may very well be divided into smaller segments by the sending entity of a lower layer protocol, so that a PDU of a higher layer protocol corresponds to several PDUs of a lower layer protocol.

5 At least four of the protocols shown in Fig. 2 have the capability of error detection and recovery, so that a Protocol Data Unit (PDU) is re-transmitted, should the originally transmitted PDU for some reason appear to not have reached the receiving protocol entity. The capability of re-transmitting data within a protocol is indicated by double-pointed arrows 237 in Fig. 2. Re-transmission of data can be executed between the MS 130 and the
10 BSS 115 by the RLC/MAC protocol 220, between the MS 130 and the SGSN 120 by the LLC protocol 215 and end-to-end by the TCP protocol 200 or the application layer 200.

The re-transmission of data can be initiated by the receiving entity of a protocol, realising that received data is faulty or that expected data is missing, or by the transmitting entity of
15 a protocol not having received an expected acknowledgement of receipt from the receiving entity of said protocol. Since re-transmission can be initiated by different protocols in a system 100, there is a risk that the same user data 300 is successfully transmitted between communicating nodes more than once. To successfully transmit the same user data 300 more than once is disadvantageous in many ways. The (often scarce) transmission
20 resources are used in a non-optimal way. One consequence of this is that fewer data transmission sessions can be served. Furthermore, the time used for completing a data transmission session will be unnecessarily long, since several PDUs will be re-transmitted even after the successful reception of an identical PDU. In some instances, data transmission times may be prolonged to such an extent that a protocol, such as e.g. the TCP
25 protocol 202, decides that the rate of data transmission should be reduced, or even that the data transmission session is not functioning properly and that it therefore should be closed. Such situations will naturally be very frustrating to the user of system 100.

In a system 100 including a mobile radio network 110 operating according to the GRPS
30 standard, used as an example in Fig. 1 and Fig. 2, a timer can be associated with each PDU transferred by a protocol capable of re-transmitting (*see 3GPP TS 44.064, Third Generation Partnership Project*, for the LLC protocol, and *3GPP TS 44.060, Third Generation Partnership Project*, for the RLC/MAC protocol). A protocol will not re-

transmit a certain PDU until the timer associated with the PDU has expired. The expiry times of the timer used by a certain protocol can then differ from the expiry times of the timer used by other protocols. Such timers can advantageously be set so that the timer associated with the lowest layer protocol expires after the shortest period of time, and a timer associated with a higher layer protocol expires after a longer period of time. In some cases, this will be a successful way of avoiding re-transmission of the same data by more than one protocol at a time. However, for reasons such as, for example, that the quality of the radio interface varies substantially over time, it can be very difficult to estimate the optimal timer expiry times.

In cases where the receiving entities of the different protocols, capable of error detection and recovery, all detect error of transmission, or when the timers of the higher layer protocols expire before the lower layer protocols have finished their re-transmission, several protocols could simultaneously be re-transmitting the same user data 300 towards the same interface. Referring now to Fig 3 as an example, application data 310, including user data 300, could e.g. be re-transmitted a number of times by RLC/MAC 220, a number of times by LLC 215, and a number of times by TCP 202. If the transmitting entity of RLC/MAC 220 is successful in transmitting an RLC/MAC PDU 365, including application data 310, the transmitting entity of LLC 215 might in the meantime have provided the transmitting entity of RLC/MAC 220 with additional copies of LLC PDU 355, including application data 310, for re-transmission. These additional copies could either have originated from the re-transmission functionality in the application layer 200, from the re-transmission functionality of TCP 202, from the re-transmission functionality in LLC 215 itself, or from a combination of these. The transmitting entity of RLC/MAC 220 will not recognise that the data included in these additional copies of LLC PDU 355 has already been successfully transmitted, and will re-transmit the additional copies of LLC PDU 355. Often, there is an upper limit to how many times a PDU should be re-transmitted by each protocol, but a scenario where a certain PDU is unnecessarily re-transmitted a large number of times can easily be foreseen. The effect of unnecessary re-transmission is, inter alia, that scarce transmission resources are being misused, that the time needed to complete a data transmission session will be unnecessarily long, and that in some instances, the data transmission session will be closed due to long transmission times.

In order to avoid unnecessary re-transmission of data, different protocols capable of error detection and recovery could be made to co-operate with each other. A higher layer protocol could e.g. be made to wait for a report regarding the result of the (re-)transmission of a certain PDU performed by lower layer protocols, before any decision is taken about whether the higher layer protocol should perform any re-transmission of said PDU. In Fig. 4, an example of such co-operation between different protocols is illustrated in signalling diagrams, where co-operation between the LLC protocol 215 and the RLC/MAC protocol 220 in transmitting data to/from MS 130 is given as an example. The discussion below will be held in terms of these two protocols. However, co-operation between other protocols capable of re-transmission of data could be implemented in a similar manner. It should be noted that Fig. 4a represents a situation where the lower layer and the higher layer re-transmission capable transmission protocol entities are located in the same node, while Fig. 4b illustrates the situation where the lower layer and the higher layer re-transmission capable transmission protocol entities are located in different nodes (cf. Fig. 2).

In Fig. 4a, an example of the provision of protocol data units from LLC 215A in MS 130 to RLC/MAC 220B in BSS 115 is illustrated in a signalling diagram, in which flow of time is indicated by arrow 400. LLC protocol 215A sends a message 401, including an LLC PDU 355, to the RLC/MAC protocol 220A in MS 130, the LLC PDU 355 being formatted according to *3GPP TS 44.064, 3rd Generation Partnership Project*, hereby included by reference. The LLC PDU 355 is indexed "N" for identification within the mobile radio network 110. RLC/MAC 220A then confirms the receipt of message 401 in an identification message 405, containing an identifier I, assigned to LLC PDU(N) 355 by RLC/MAC 220A and used for identification of LLC PDU(N) 355 in the communication between LLC 215A and RLC/MAC 220A. Furthermore, RLC/MAC 220A transmits the data included in LLC PDU(N) 355 to the RLC/MAC 220B in BSS 115, see message 410, in an RLC/MAC PDU 365 in message 410. In the example given in Fig. 4a, RLC/MAC 220B in BSS 115 does not acknowledge the receipt of message 410, and RLC/MAC 220A re-transmits the RLC/MAC PDU 365 in messages 410A, 410B, 410C and 410D. When having performed the re-transmission of RLC/MAC PDU 365 a number of times, corresponding to a pre-set maximum number of times for re-transmission (i.e. four times in the example given), RLC/MAC 220A reports, in message 415, to LLC 215A the failure of transmission of the LLC PDU 355 identified by the identifier I. LLC 215A then re-

transmits the LLC PDU(N) 355 to RLC/MAC 220A in a message 420, identical to message 401. Alternatively, LLC 215A could issue an alert, indicating that an error has occurred, and/or provide RLC/MAC 220A with a different LLC PDU 355 to be transmitted. As seen in the signalling diagram of Fig. 4a, LLC 215A does not perform any re-transmission of LLC PDU(N) 355 until LLC 215A has received, in message 415, a negative report regarding the transmission of said LLC PDU(N) 355 from RLC/MAC 220A.

In Fig. 4b, an example of a signalling diagram representing the provision of protocol data units from the LLC 215B in SGSN 120 to the RLC/MAC 220A in MS 130, in which the arrow 400 indicates the flow of time. An LLC PDU(N) 355 is transmitted, in message 425, from LLC 215B towards RLC/MAC 220B via BSSGP 230B in SGSN 120. The LLC PDU(N) 355 is indexed "N" for identification purposes within the mobile radio network 110. Message 425 can then be transparently transmitted from BSSGP 230B to BSSGP 230A in BSS 115 via Network 235B in SGSN 120 and Network 235A in BSS 115, and from BSSGP 230B to RLC/MAC 220B in BSS 115, see messages 425*i-iv*. Upon reception of message 425*iv*, RLC/MAC 220B confirms the receipt of message 425 in an identification message 430 sent towards the LLC 215B, the identifier message 430 containing an identifier I, used for identification of LLC PDU(N) 355 in the communication between LLC 215 and RLC/MAC 220. The message 430 can then be transparently transmitted from RLC/MAC 220B in BSS 115, to LLC 215B in SGSN 120 via BSSGP 230A and Network 235A in BSS 115, and Network 235B and BSSGP 230B in SGSN 120. The exchange of message 430 can be distinguished from the exchange of message 425 by the use of a parameter Type of Primitive (TOP) included in the message.

When RLC/MAC 220B has received message 425*iv*, RLC/MAC 220B furthermore transmits, in message 435, the data included in LLC PDU(N) 355 received in message 425*iv* to RLC/MAC 220A in MS 130, *i.e* over radio interface 105, in an RLC/MAC PDU 365. In the example given, the transmission of RLC/MAC PDU 365 was successful at the first attempt, and an acknowledgement of the receipt of RLC/MAC PDU 365 is transmitted from RLC/MAC 220A to RLC/MAC 220B (see message 440). Upon reception of the acknowledgement message 440, the RLC/MAC 220B in BSS 115 then reports, to the LLC 215B in SGSN 120, the success of the transmission of the protocol data unit identified by identifier I (see message 445). Message 445 could be transparently transferred to LLC

215B in a similar manner to the transparent transmission of message 430 (see messages 445i-iv). LLC 215B in SGSN 120, which has not sent any further protocol data units towards RLC/MAC 220B since sending message 425, can upon the reception of message 445iv send another protocol data unit to RLC/MAC 220B, e.g. LLC PDU(N+1) 355 (see message 450). The messages 425, 430 and 445 will be further discussed in relation to Figs. 5a, 5b and 5c.

In fig. 4a and 4b, for illustrative purposes only, the messages 410 and 435 have been shown to carry the same amount of user data 300 as the messages 401 and 425, respectively, i.e., a message 401/425 corresponds to one message 410/435. However, in most implementations, the transmitting entity of RLC/MAC 220 would divide an LLC PDU 355 into smaller segments, each segment being transmitted in a separate message 410/435. Thus, each message 401/425 would correspond to several messages 410/435, see e.g. 3GPP TS 44.060, 3rd Generation Partnership Project, hereby incorporated by reference. In order to report a successful transmission of a certain LLC PDU(N) 355 across the radio interface 105, RLC/MAC 220 would have received acknowledgement from the receiving node that all RLC/MAC PDU 365 messages 410/435 corresponding to the LLC PDU(N) 355 carried in message 401 have been successfully received.

In Fig. 4a, the re-transmission of an LLC PDU 355 by LLC 215A was initiated when no response was received by RLC/MAC 220A from RLC/MAC 220B, even after RLC/MAC 220A having re-transmitted message 410 several times. In other situations, the re-transmission of an LLC PDU 355 could be triggered by a negative acknowledgement received by the transmitting entity of RLC/MAC 220 from the receiving entity of RLC/MAC 220 – the receiving entity informing the transmitting entity that it has not successfully received the transmitted message 410. When the transmitting entity of RLC/MAC 220 receives a positive acknowledgement from the receiving entity of RLC/MAC 220, obviously, no re-transmission of the LLC PDU 355 by the transmitting entity of LLC 215 is needed. This case is illustrated in Fig. 4b.

The signalling diagrams presented in Figs 4a and 4b can be varied in many ways. The message 405/430 of Fig. 4 could e.g. be omitted, and instead, the transmitting entity of LLC 215 could assign an identifier I to LLC PDU(N) 355, said identifier being included in

message 401/425. The transmitting entity of RLC/MAC 220 could then send an acknowledgement of reception of message 401/425 to the transmitting entity of LLC 215, or alternatively, the transmitting entity of RLC/MAC 200 could send no confirmation of the reception of message 401/425 to the transmitting entity of LLC 215, but rather, the transmitting entity of LLC 215 could assume that message 401/425 is always safely received by the transmitting entity of RLC/MAC 200.

In another embodiment of the invention, the index "N", used for identification of an LLC PDU 355 in the network 110, could be used for identification of a certain LLC PDU 355 also in the communication between transmitting entities of LLC 215 and RLC/MAC 220 (referred to in this context as local communication) rather than a separate, local, identifier I. Message 405/430 could then be omitted, or could contain an acknowledgement of the reception of LLC PDU(N) 355. Message 415/445 could then contain information about the success/failure of the transmission of the data contained in LLC PDU 355 indexed "N" over the radio interface 105. An advantage of doing so is that only one identifier is used for the identification of an LLC PDU 355, resulting in a simpler identification system. However, there are advantages also of using a separate identifier for the local communication between the transmitting entities of LLC 215 and RLC/MAC 220. One such advantage is that the identifier I does not, since it is only used locally, need to be transmitted over the radio interface 105, and can hence be a large number. The identifier N on the other hand, since it is used within mobile radio network 110 and hence is transmitted over the radio interface which has a limited bandwidth, has, in a system 100 including a GPRS radio interface, a value of typically 512 bits. A local identifier which does not have to be transmitted over the radio interface 105, could take values larger than the maximum value of N. Thus, the risk of confusing different protocol data units with each other, or alternatively, the risk of having to wait for the confirmation of the successful transmission of a PDU(N) before a different PDU, identified by the same number N, can be transmitted, can be reduced. Furthermore, if the identifier N is used as a local identifier in the communication between the transmitting entities of LLC 215 and RLC/MAC 220, the transmitting entity of RLC/MAC 220 will have to open the LLC header 360 in order to read the value of identifier N. If a separate identifier I is used as the local identifier, then the transmitting entity of RLC/MAC 220 will not need to open the LLC header 360, thus making the transmission process faster. Alternatively, the identifier N could be handled

separately in the communication between RLC/MAC 220 and LLC 215, in a manner similar to the handling of identifier I.

In Figs. 4a and 4b, the transmitting entity of LLC 215 has been shown not to send any further messages 401/425 to the transmitting entity of RLC/MAC 220 after having sent message 401/425, until having received message 415/445. However, the transmitting entity of LLC 215 may very well transmit LLC PDUs 355 other than the LLC PDU(N) 355 included in message 401/425 to the transmitting entity of RLC/MAC 220 before having received message 415/445 from RLC/MAC 220A. A certain LLC PDU 355 will, however, be transferred only once by LLC 215A before LLC 215A has received the result of transmission (message 415/445) regarding said certain LLC PDU 355. The transmission of PDU(N+1) etc. from the transmitting entity of LLC 215 could take place either before or after the transmitting entity of LLC 215 has received message 405/430.

An example of message 401/425 is shown in Fig. 5a, where the message 401/425 contains two different fields. A first field 500 is used to indicate the Type of Primitive (TOP) to be transmitted in the message. In message 401/425, the field 500 could take the value "LL-Data identifier", and e.g. include the value "N". Field 505, shown in Fig. 5a, is used to transmit the LLC PDU 355 to be forwarded by RLC/MAC 220. The digits above the respective fields are used to indicate the number of octets therein, and are given as examples only. Field 505, could for example contain n octets, of which n-3 could be used for LLC PDU 355, one octet could be used to indicate the type of data, and two octets could be used to indicate the length of LLC PDU 355.

In Fig. 5b, an example of messages 405/430 is shown, used in an embodiment where an identifier I is assigned to each LLC PDU 355 by the transmitting entity of RLC/MAC 220. The message 405/430 given as an example in Fig. 5b contains three fields: type of primitive 510, Identifier I 515 and LLC PDU 520. The field 510 could e.g. take the value "LL-Data Identifier I", used to indicate that the message 405/430 contains an identifier I identifying a certain LLC PDU 355. Field 515 contains the value of identifier I, which e.g. could consist of 4 octets, providing a large range of identifier I values. In order to indicate which LLC PDU 355 is identified by the value of field 515, the LLC PDU 355 could be included in message 405/430 in field 520. Alternatively, only a part of the LLC PDU 355

containing the identifier N could be transmitted in field 520. However, in cases where the transmitting LLC 215 awaits a message 405/430 from the transmitting RLC/MAC 220 before another LLC PDU 355 is transmitted, the field 520 could be omitted. LLC 215 could then associate the identifier in field 515 of a message 405/430 with the last transmitted LLC PDU 355.

In Fig. 5c, an example of the messages 415/445 is given. In field 525, the type of primitive to be transmitted by message 415/445 is indicated, and the value of field 525 could e.g. be "Success/Failure for LLC PDU". In field 530, the value of identifier I, used for identification of the specific LLC PDU 355 about which information is transmitted, is given. Field 535 is used in order to indicate whether the transmission of the LLC PDU 355 identified by identifier I was successful or not. This field could e.g. comprise one octet, where the value 11111111 could represent success and the value 00000000 could represent failure.

In an embodiment where the identifier I is assigned to a certain LLC PDU 355 by the transmitting entity of LLC 215, the contents of messages 401/425, 405/430 and 415/445 should be modified accordingly – the identifier I could e.g. be included as a field in message 401/425. Using the identifier N for identification of a LLC PDU 355 in the communication between LLC 215 and RLC/MAC 220 would also give rise to modifications of messages 401/425, 405/430 and 415/445.

An embodiment of the invention is illustrated in a flow chart in Fig. 6. In step 600, the transmitting entity of LLC 215 provides the transmitting entity of RLC/MAC 220 with an LLC PDU 355, indexed N, to be transmitted over radio interface 105. In step 605, the transmitting entity of RLC/MAC 220 identifies the LLC PDU(N) 355 with identifier I. The identifier I can either have been assigned to LLC PDU(N) 355 by the transmitting entity of LLC 215 and included in the message containing the LLC PDU(N) 355 sent from the transmitting entity of LLC 215 in step 600, or could be assigned to LLC PDU(N) 355 by the transmitting entity of RLC/MAC 220 upon reception of the LLC PDU(N) 355. The transmitting entity of RLC/MAC 220 then sends an acknowledgement of reception of LLC PDU(N) 355 identified by identifier I to the transmitting entity of LLC 215. A counter in the transmitting entity of RLC/MAC 220 is then set to 1 in step 615. In step 620, the

transmitting entity of RLC/MAC 220 transmits the data contained in LLC PDU(N) 355 towards the receiving entity of RLC/MAC 220, located in a node different to the node in which the transmitting entity of RLC/MAC 220 is located. This transmission is often performed in a manner so that the LLC PDU(N) 355 is divided into segments, and several RLC/MAC PDUs 365, all carrying part of LLC PDU(N) 355, are transmitted towards the receiving entity of RLC/MAC 220. However, in order to simplify the description, it is here assumed that LLC PDU(N) 355 is transmitted in one RLC/MAC PDU 365. The transmitting entity of RLC/MAC 220 then awaits an acknowledgement of reception from the receiving entity of RLC/MAC 220 in step 625. If an acknowledgement is received, or if a timer in RLC/MAC 220 related to the awaiting of an acknowledgement expires, then step 630 is entered, in which step it is checked whether the data contained in LLC PDU(N) 355 has been successfully received by the receiving entity of RLC/MAC 220. If the data of LLC PDU(N) 355 has been successfully received, then step 635 is entered, in which step the transmitting entity of RLC/MAC 220 informs the transmitting entity of LLC 215 that the LLC PDU 355 identified by identifier I has been successfully received by the receiving entity of RLC/MAC 220. If the result of the check in step 630 is that the data of LLC PDU(N) 355 has not been successfully received, then step 640 is entered, in which the counter is incremented by one. In step 645, it is then checked whether the value of the counter is larger than a limit indicating a maximum number of times that an RLC/MAC PDU 365 should be re-transmitted. If so, the transmitting entity of RLC/MAC 220 informs the transmitting entity of LLC 215 that the transmission of the LLC PDU 355 identified by identifier I has failed. However, if the counter has a value which is lower or equal to the limit, then step 620 is re-entered. In some embodiments, a timer could be used rather than a counter for determining how many times a certain RLC/MAC PDU 365 should be re-transmitted.

If the procedure described in Fig. 6 has reached step 635, then the transmitting entity of LLC 215 could advantageously transmit another LLC PDU 355 towards the transmitting entity of RLC/MAC 220. If the procedure reaches step 650 on the other hand, where RLC/MAC 220 informs LLC 215 of the failure of the transmission of LLC PDU(N) 355, then step 655 is entered, in which it is decided whether or not to re-transmit the LLC PDU(N) 355. If it is decided that LLC PDU(N) should be re-transmitted, then step 600 is re-entered. If it is decided that LLC PDU(N) should not be re-transmitted, then step 660 is

entered. In step 660, another LLC PDU 355 is transmitted, following the flow chart described in Fig. 6, and/or an alert is issued indicating that an error has occurred. The decision made in step 655 can e.g. be based on how many times the transmitting entity of LLC 215 has already re-transmitted LLC PDU(N) 355.

5

The procedure described by the flow chart in Fig. 6 is equally applicable to situations where the transmitting higher layer protocol and the transmitting lower layer protocol are located in the same node (cf Fig. 4a) and where they are located in different nodes (cf. Fig. 4b). Furthermore, the flow chart can be altered in many ways. For example, the LLC PDU(N) 355 could be identified by the index "N", rather than by the local identifier "T". In this case, as well as in the case when LLC 215 assigns a local identifier "T" to the LLC PDU(N) 355, step 610 could be omitted. Moreover, the transmission of other LLC PDUs could advantageously take place in parallel to the procedure described in Fig. 6, the transmission of LLC PDU(N-1), LLC PDU(N), LLC PDU(N+1) etc. occurring sequentially. The transmission of LLC PDU(N-1), LLC PDU(N+1) etc would then also follow the procedure described in Fig. 6.

10

15

20

25

30

The protocol stacks shown in Fig. 2, used for data transmission in data communication systems 100 including a mobile radio system 110 operating according to the GPRS standard, are only given as an example of protocol stacks to which the invention can advantageously be applied. The invention is equally applicable to data communication systems 100 using other protocol stacks in which more than one protocol has the capability of re-transmission of data. An example of such a data communication system 100 is a data communication system 100 including a mobile radio system 110 operating according to the UMTS standard. In Fig. 7, an example of protocol stacks used for the transmission of user data 300 between the nodes MS 130, UTRAN (UMTS Terrestrial Radio Access Network) 115 (corresponding to BSS 115 in Fig. 1), 3G-SGSN 120 and 3G-GGSN 125 of such a data communication system are illustrated, where 3G indicates "3rd generation". The protocols used within a MS 130 operating according to the UMTS standard could e.g. be, as shown in Fig. 7, an application protocol 200A, the TCP protocol 202A, the IP protocol 205A, the Packet Data Convergence Protocol (PDCP) 710A and RLC/MAC 220A. In UTRAN 115, the protocols RLC/MAC 220B and PDCP 710B are used for communication with MS 130, while GPRS Tunnel Protocol-User plane (GTP-U) 715A and User Datagram

Protocol/Internet Protocol (UDP/IP) 720A are used for communication with 3G-SGSN 120. In the 3G-SGSN node 120, the protocols UDP/IP 720B and GTP-U 715B are used for communication of data with UTRAN 115, while protocols GTP-U 715C and UDP/IP 720C are used for exchange of data with 3G-GGSN 125. In 3G-GGSN 125, the protocols
5 UDP/IP 720D, GTP-U 715D and IP 205B are used for communication of data with 3G-SGSN 120. In the data transmission system illustrated by protocol stacks in Fig. 7, at least three of the protocols are capable of re-transmitting data: the RLC/MAC protocol 220, TCP protocol 202 and the application protocol 200.

10 The invention is equally applicable to all data communication which uses more than one protocol capable of re-transmitting data. The invention is especially beneficial to data communication involving interfaces where the quality of the transmission and/or the available bandwidth varies over time. In such cases, it is difficult to pre-set timers associated with re-transmission in an optimal way, since the amount of time needed for
15 successful transmission of a certain amount of data varies with time. Examples of systems providing data communication exhibiting this behaviour are UMTS, GPRS, W-LAN and other cellular systems and land mobile radio networks. In data communication system such as GPRS and UMTS, the bandwidth over radio interface 105 varies over time mainly for two reasons: the quality of the radio transmission varies over time due to variations in
20 geographical and meteorological conditions, and the bandwidth allocated to a certain data call varies over time due to the varying load in the network. Another example of data communication systems to which the invention could advantageously be applied is data communication systems including links which provide different bandwidth in different directions. Although the protocols which has been used as an example to illustrate the
25 invention, LLC and RLC/MAC, are located in adjacent layers, the invention is equally applicable to protocols capable of re-transmission of data that are not located in adjacent layers.

30 One skilled in the art will appreciate that the present invention is not limited to the embodiments disclosed in the accompanying drawings and the foregoing detailed description, which are presented for purposes of illustration only, but it can be implemented in a number of different ways, and it is defined by the following claims.

Claims

1. A method in a data communication system wherein data is transmitted by use of at least two protocols that are capable of re-transmission of data, each of said protocols being implemented in at least two nodes of said data communication system, the implementation of a protocol implemented in a transmitting node being a transmitting protocol entity and the implementation of a protocol in a receiving protocol being a receiving protocol entity, one of said at least two protocols capable of re-transmission of data being a higher layer protocol than another of said at least two protocols, said another protocol therefore being a lower layer protocol, the higher layer transmitting protocol entity providing the lower layer transmitting protocol entity with a protocol data unit to be transmitted, said method being characterised by the following steps:

awaiting, in the higher layer transmitting protocol entity, a transmission result from said lower layer transmitting protocol entity, said transmission result reporting the result of the transmission of said protocol data unit by said lower layer transmitting protocol entity; receiving, in said higher layer transmitting protocol entity, said transmission result; and deciding, responsive to said transmission result, whether the higher layer transmission protocol entity should re-provide said lower layer transmitting protocol entity with said protocol data unit.

20

2. The method of claim 1, wherein

said protocol data unit is identified, by the higher layer transmitting protocol entity in communication with the lower layer transmitting protocol entity, by use of an identifier.

25

3. The method of claim 2, wherein

said identifier is an identifier local to the communication between the higher layer transmitting protocol entity and the lower layer transmitting protocol entity.

30

4. The method of claim 3, wherein

said identifier is assigned to said protocol data unit by said higher transmitting protocol entity.

5. The method of any of claims 2-4, wherein

said higher layer transmitting protocol entity receives an acknowledgement of reception of said protocol data unit from said lower layer transmitting protocol entity after having provided said lower layer transmitting protocol entity by said protocol data unit, said protocol data unit being identified by said identifier in said acknowledgement of reception.

6. A method according to claim 1, modified in that said steps of awaiting, receiving and deciding are replaced by the following step:

sending, from the lower layer transmitting protocol entity, a transmission result to the higher layer transmitting protocol entity, said transmission result reporting the result of transmission of said protocol data unit by said lower layer transmitting protocol entity.

7. The method of claim 6, wherein

said transmission result is transmitted to said higher layer transmitting protocol entity in a message which is transparently relayed by some or all of any intermediate protocol entities.

8. The method of claim 6 or 7, wherein

said protocol data unit is identified, by the lower transmitting protocol entity in communication with the higher layer transmitting protocol entity, by use of an identifier.

9. The method of claim 8, wherein

said identifier is assigned to the protocol data unit by said lower layer transmitting protocol entity.

10. The method of any of claims 1-9, wherein

said higher layer transmitting protocol entity and said lower layer transmitting protocol entities are located within different nodes.

11. The method of any of claims 1-10, wherein

said data communication system comprises a radio interface.

12. The method of claim 11, wherein

said radio interface is a radio interface in a mobile radio communication system.

13. The method of claim 12, wherein

5 said mobile radio communication system is a mobile radio communication system operating according to the General Packet Radio System standard; and

 the higher layer transmitting protocol entity is a Logical Link Control protocol and the lower layer transmitting protocol entity is a Radio Link Control/Media Access Control protocol.

10 14. A computer program comprising software code portions for, when said software code portion is run on a computer serving as a transmitting node in a data communications system, providing another computer program with a protocol data unit to be transmitted within said data communication system, said computer program further comprising
15 software code portions for re-providing said another computer program with said protocol data unit, said computer program being characterised by

 computer code portions for awaiting, from said another computer program, a transmission result reporting the transmission of said protocol data unit; and

20 computer program portions for receiving said transmission result from said another computer program.

15. The computer program of claim 14, further comprising

25 computer code portions for deciding whether or not to re-provide said protocol data unit to said another computer program, said computer code portions for deciding being adapted to use said transmission result in deciding whether or not to re-provide said protocol data unit.

16. The computer program of claim 14 or 15, further comprising

30 computer code portions for allocating an identifier to each protocol data unit, and computer code portions for informing said another computer program about said identifier.

17. The computer program of any of claims 14-16, said computer code portions for providing and re-providing being adapted to provide and re-provide according to the Logical Link Control protocol.

5 18. A computer program comprising software code portions for, when said software code portion is run on a computer serving as a transmitting node in a data communications system, receiving from another computer program a protocol data unit to be transmitted within said data communication system and computer code portions for transmitting said protocol data unit, said computer program further comprising software code portions for re-
10 transmitting said protocol data unit, said computer program being characterised by software code portions for sending a message including the result of the transmission or re-transmission of said protocol data unit to said another computer program.

15 19. The computer program of claim 18, further comprising software code portions for allocating an identifier to said protocol data unit, and software code portions for informing said another computer program about said identifier.

20 20. The computer program of claim 18 or 19, said computer code portions for receiving, transmitting and re-transmitting being adapted to receive, transmit and re-transmit according to the Radio Link Control/Media Access Control protocol.

25 21. A computer program product comprising a computer readable medium, having stored thereon a computer program according to any of claims 14-20.

22. A node in a data communication system wherein data is communicated, said node being characterised by
a computer program product according to claim 21.

30 23. A data communication system wherein data is communicated being characterised by a node according to claim 22.

Abstract

The present invention relates to a method and apparatus for improving the procedures for error detection and recovery in data communication systems and thereby facilitating a better use of data transmission resources. According to the invention, different protocols capable of re-transmission of data are made to communicate with each other in order to avoid that several protocols simultaneously re-transmit the same data towards the same interface. The transmitting entity of a higher layer protocol will, according to the invention, await the result of the transmission of a certain protocol data unit by a lower layer protocol before making the decision of whether or not the transmitting entity of the higher layer protocol should re-transmit the certain protocol data unit.

9
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199

Fig. 1

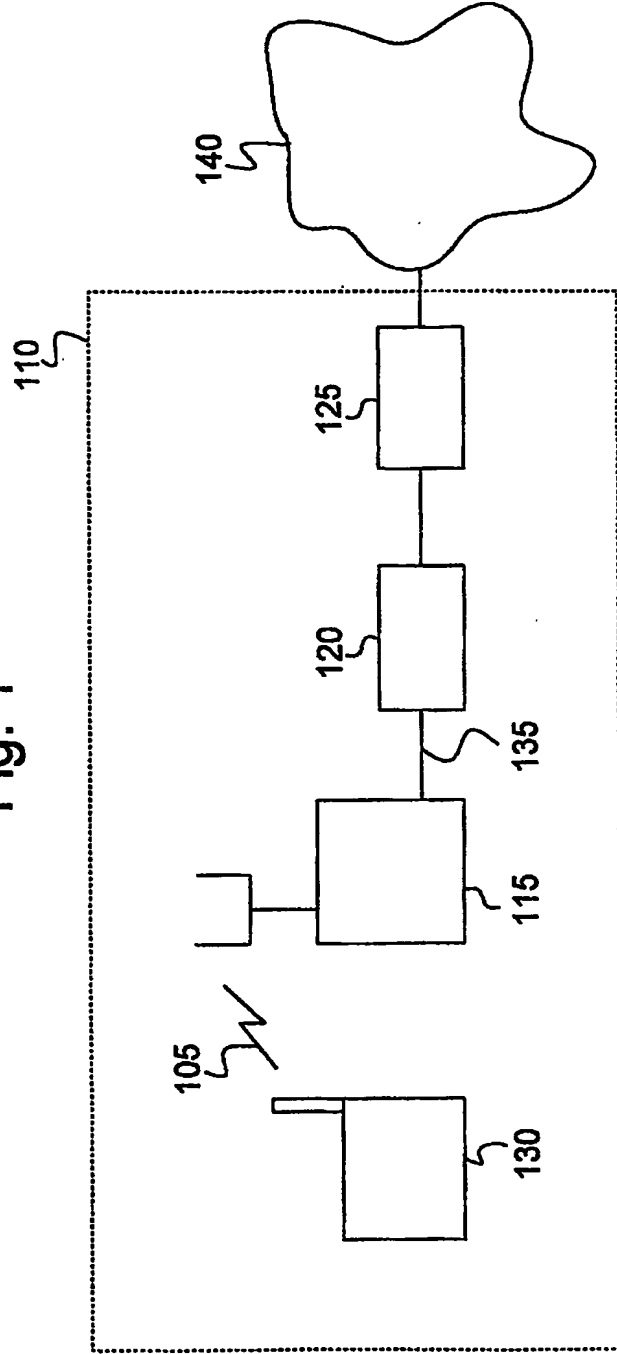


Fig. 2

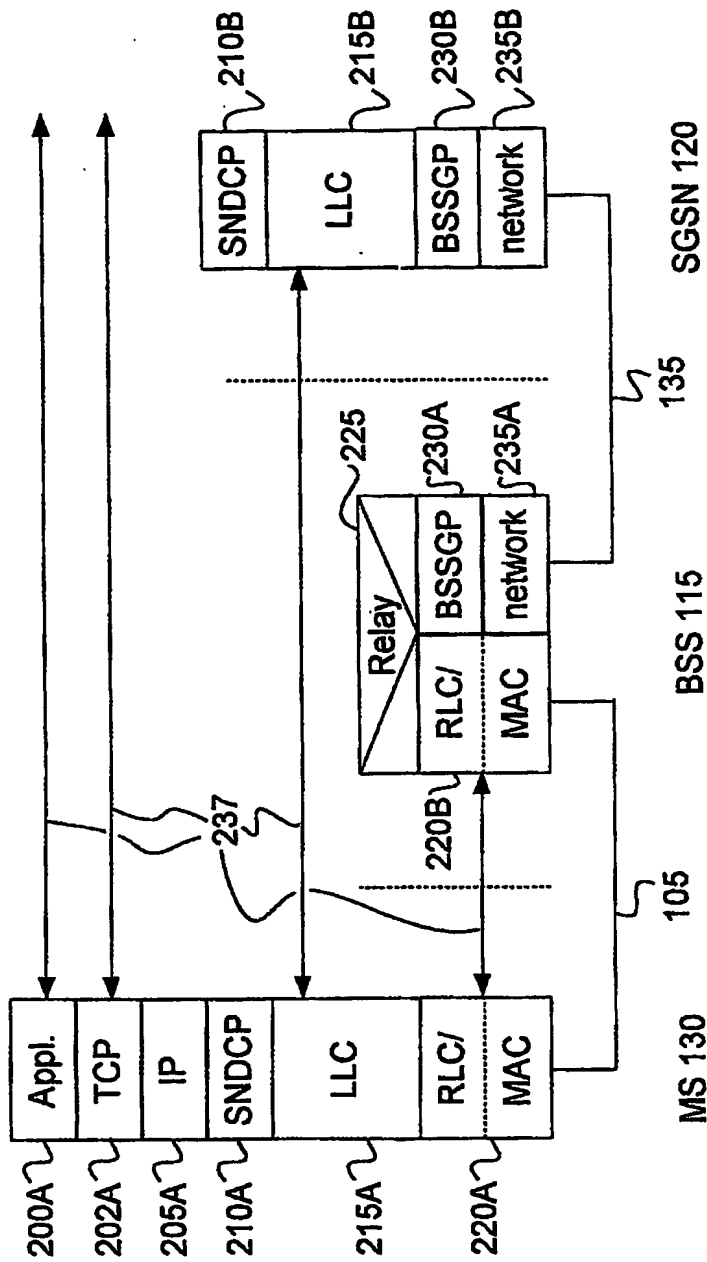
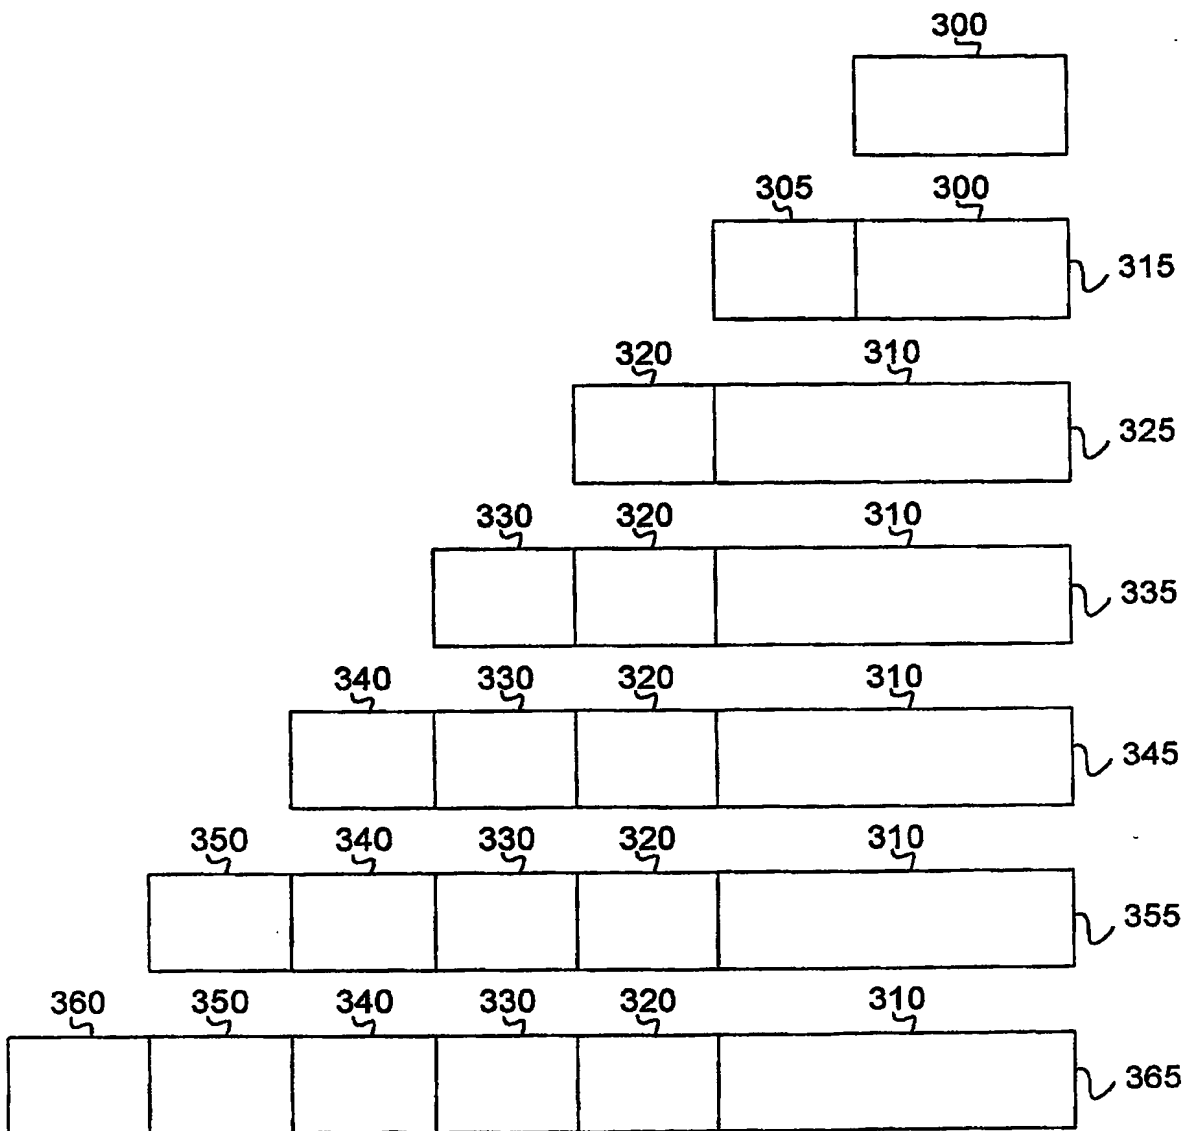


Fig. 3






Fig. 4b

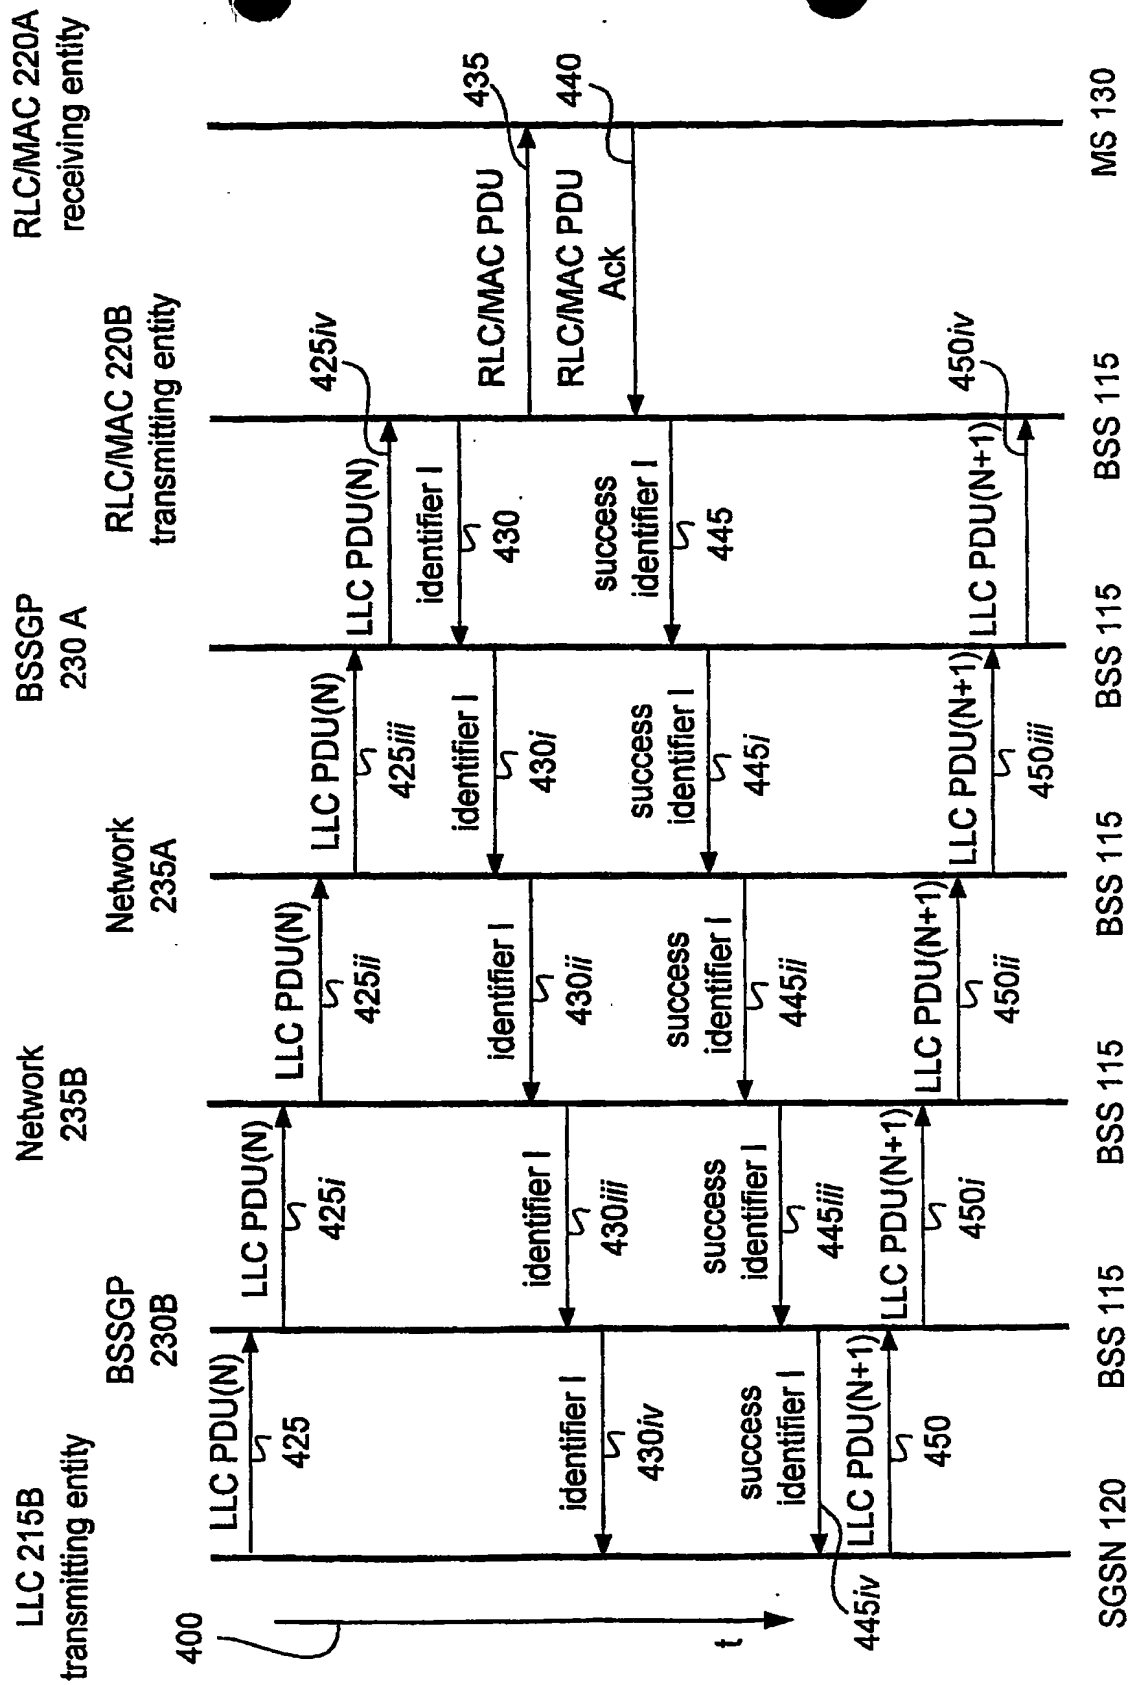


Fig. 5a

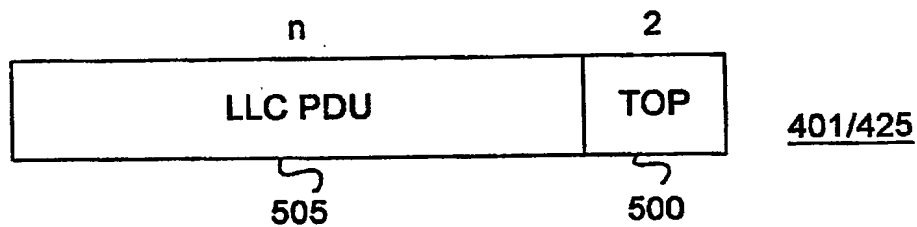


Fig. 5b

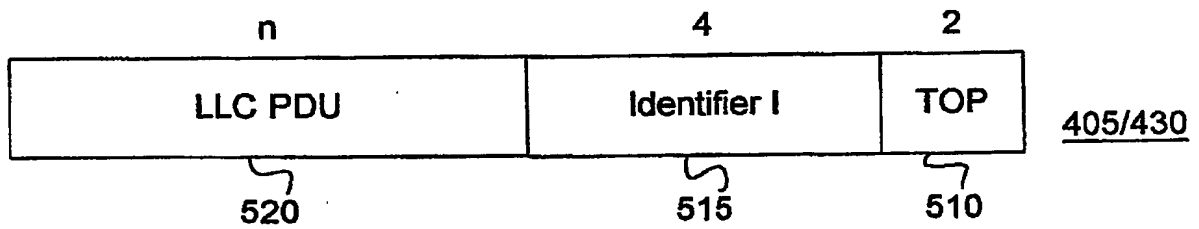


Fig. 5c

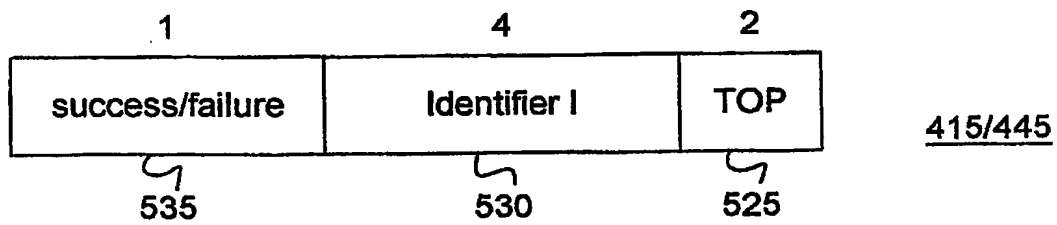


Fig. 6

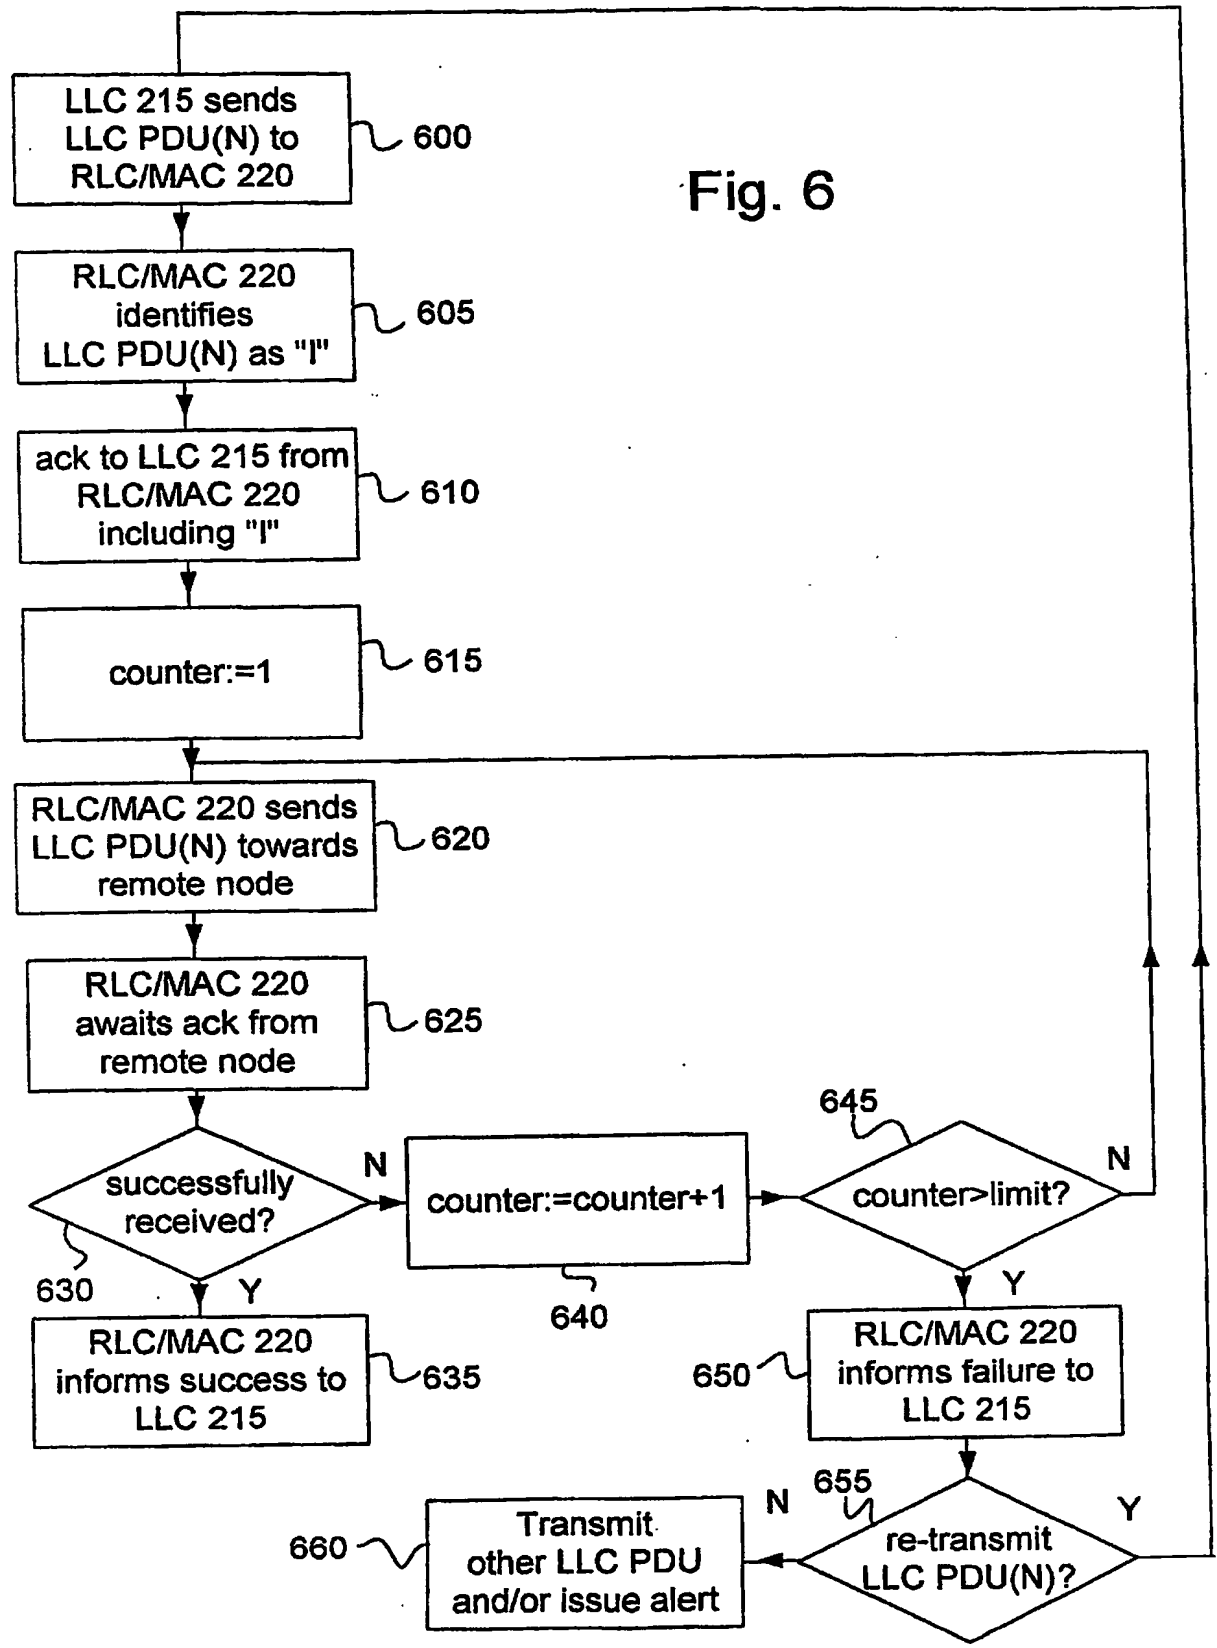


Fig. 7

